



LIBRA 6500R

INFLATABLE BOAT



SPECIFICATIONS


| | |
|---------------------|--------------------|
| Length Overall: | 6.50 M |
| Length Inside: | 5.00 M |
| Beam Overall: | 2.40 M |
| Beam Inside: | 1.40 M |
| Weight: | 745 KG |
| Capacity Persons: | 15 NOS |
| Max Engine: | 75 HP x 2 NOS |
| Recommended Engine: | 50 HP x 2 NOS |
| Turbe Diameter: | 50 cm |
| Number Of Chambers: | 5 NOS |
| Stowed Dimensions: | 660 x 300 x 180 cm |

FEATURES


G.R.P Hull & Deck made from one piece mould
End grain balsa sandwich laminate on hull and deck
Under floor control cable conduit
Tubes manufactured of heavy duty re-inforced Hypalon fabric
5 separate air chambers
Automatic pressure relief valves & inflatable valves for eac
Under floor fuel tank (47 gal) with air vents
Reinforced cone end
All round rubbing strakes
Self drainage non - skid deck
Re-inforced transom for long shaft motors with outboard well
Center console with wind screen & seat fitted
Navigation light - Electrical switch panel
Auto bilge pump
2 NOS water proof stern lockers & bow locker
4 NOS stainless steel lifting eyes & heavy duty mooring clea
2 NOS stainless steel stern lifting U-bolt
Lifelines - Paddles and retainers
Foot pump and repairing kit
S.S bow towing U-boltMax. Draft



GENERAL ARRANGEMENT PLAN - LIBRA 6500R

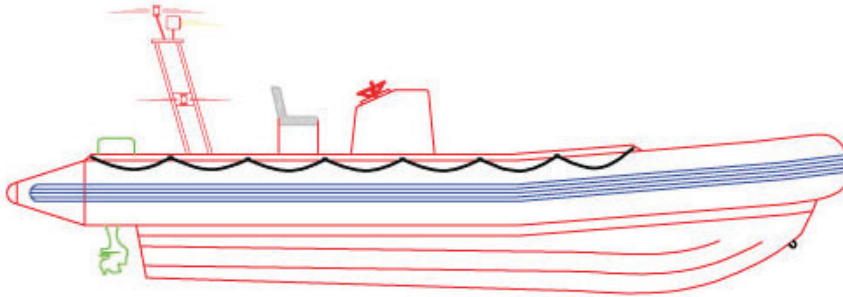

SIDE VIEW

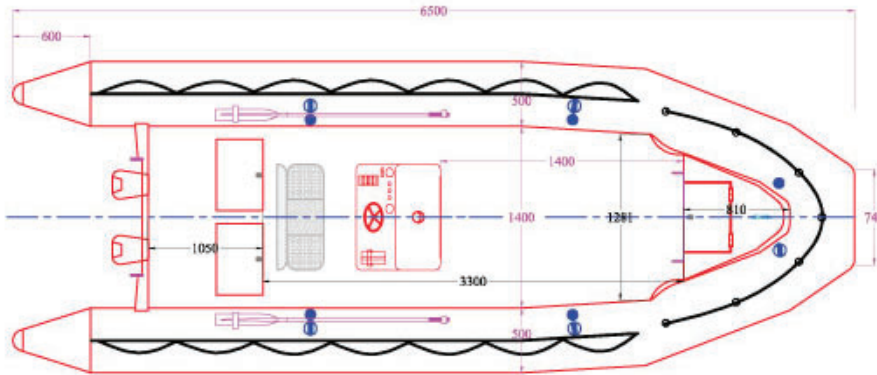

TOP VIEW DECK LEVEL